



SANME




VSI 系列 立轴冲击式破碎机

*VSI Series
Vertical Impact Crushers*



上海山美环保装备股份有限公司
(原上海山美重型矿山机械有限公司)
SHANGHAI SANME MINING MACHINERY CO., LTD.
(中德合资控股)
(Sino-German JV Holding)

VSI系列立式冲击破碎机 *VSI Series Vertical Shaft Impact Crusher*

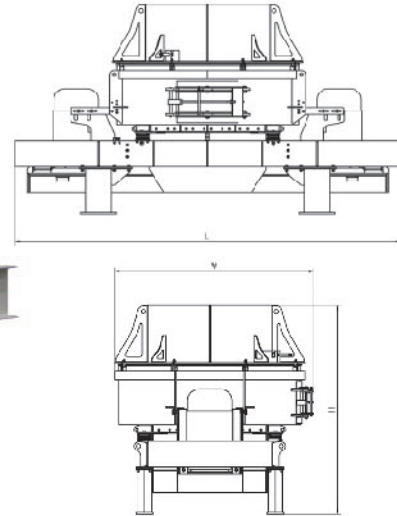

VSI系列立轴冲击式破碎机（VSI制砂机）是我公司研制并生产的高性能制砂设备。该机具有“石打石”和“石打铁”两种形式。

VSI Series Vertical shaft Impact Crushers, which is high-functioned equipment for making sand and shaping, is researched and produced by our corporation, absorbed with the advanced technology from Germany, and owned advanced world standards. This equipment has two types: rock-on-rock and rock-on-iron.

特点及优势:

- 破碎效率高, 具有细碎、粗磨功能;
- 结构简单, 安装、维修方便, 运行成本低;
- 产品粒形优异, 呈立方体, 针片状含量极低, 适宜骨料整形、人工制砂及高等级公路骨料生产;

Features and Benefits

- High production of crushing, has the function of fine crushing and rough grinding;
- Simple structure, easy to set up and repair, low cost in operation.
- Excellent shape of product, mainly the product shape is cubic with small fraction of elongated flaky particle shape, suitable for aggregate shaping, manufactured sand.

技术参数 *Technical Data*

型号 Model	最大入料粒度 Max Feed Size(mm)	叶轮转速 Speed of Rotor(r/min)	通过量 Capacity(t/h)	电机功率 Motor Power(kw)	外型尺寸 Dimensions(LxWxH)(mm)	重量 Weight(kg)
VSI-3000	45(70)	1700-2000	30-60	75-90	3080×1716×2126	≤5310
VSI-4000	55(70)	1400-1620	50-90	110-150	4100×1916×2166	≤7840
VSI-5000	65(80)	1330-1530	80-150	180-220	4300×2215×2427	≤11200
VSI-6000	70(100)	1200-1400	120-250	264-320	5300×2728×2773	≤14590
VSI-7000	70(100)	1000-1200	180-350	320-400	5300×2728×2863	≤16580
VSI-8000	80(150)	1000-1100	250-380	400-440	6000×3000×3420	≤23450
VSI-9000	80(150)	1000-1100	380-600	440-630	6000×3022×3425	≤23980

- 注:** 1.上述生产能力是在破碎物料密度为 $1.6 \times 10^3 \text{kg/m}^3$ 时开路循环生产中总吨数。生产能力与破碎物料的物理性能、给料方式、进料粒度及其组成有关;
2.括号内数值适用于低磨蚀性物料。
3.液压开盖和自动润滑装置为选装配置。

- Note:** 1.The capacity is total tons per hour passing through crusher at open circuit when crushing mid-hard material and bulk density with $1.6 \times 10^3 \text{kg/m}^3$. Capacities are relative to physical character and type of feeding, feeding size and composition and so on.
2.The number in the brackets is applicable to low abrasive material.
3.Hydraulic decap and automatic lubricating device are optional configuration.



上海山美环保装备股份有限公司
(原上海山美重型矿山机械股份有限公司)
SHANGHAI SANME MINING MACHINERY CORP., LTD.
(中德合资控股)
(Sino-German JV Holding)



山美股份官方微信

版权所有 翻印必究 中国印制 Printed in China
SANME-10C | VSI | 2018-08 | 5000

地址：上海市奉贤区青村镇奉村路 258 号
邮编：201414
电话：021-5759 1166 5759 1188
传真：021-5756 6188 5820 0089
网址：www.shsmzj.com
电邮：info@sanmecorp.com

Add: No.258, Fengcun Road, Qingcun County, Fengxian District,
Shanghai 201414, China
Tel: +86-21-5712 1166 5759 1188
Fax: +86-21-5756 6188 5820 0089
Website: www.sanmecrusher.com
E-mail: sales@sanmecorp.com

免费热线：400-921-5566
售后专线：021-5712 7766

Free Hotline: 400-921-5566
Service Center: +86-21-5712 7766

- 我们的产品不断的更新和改进中，我们保留在未事先告知用户的情况下，更改参数及设计的权力。
Our products are constantly updated and improved, we reserve the right to change parameters and design without advance notification of customers.
- 照片中产品外观颜色与实际机型存在差异，颜色标准以实物为准。
If there are any discrepancy and difference between color of product appearance and actual machine type in the picture, color standard is subject to actual object.
- 本手册中的配置不一定是出厂标准配置，购买时请详细咨询我们。
Specifications and design in the brochures are not always the standard. Please consult us particularly when purchasing.